


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS						
J	-	P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
		0		RELEASED	FJ00-2455-01	24OCT01	ET	KA
		01		REVISED	FJ00-2423-01	19DEC01	ET	KA

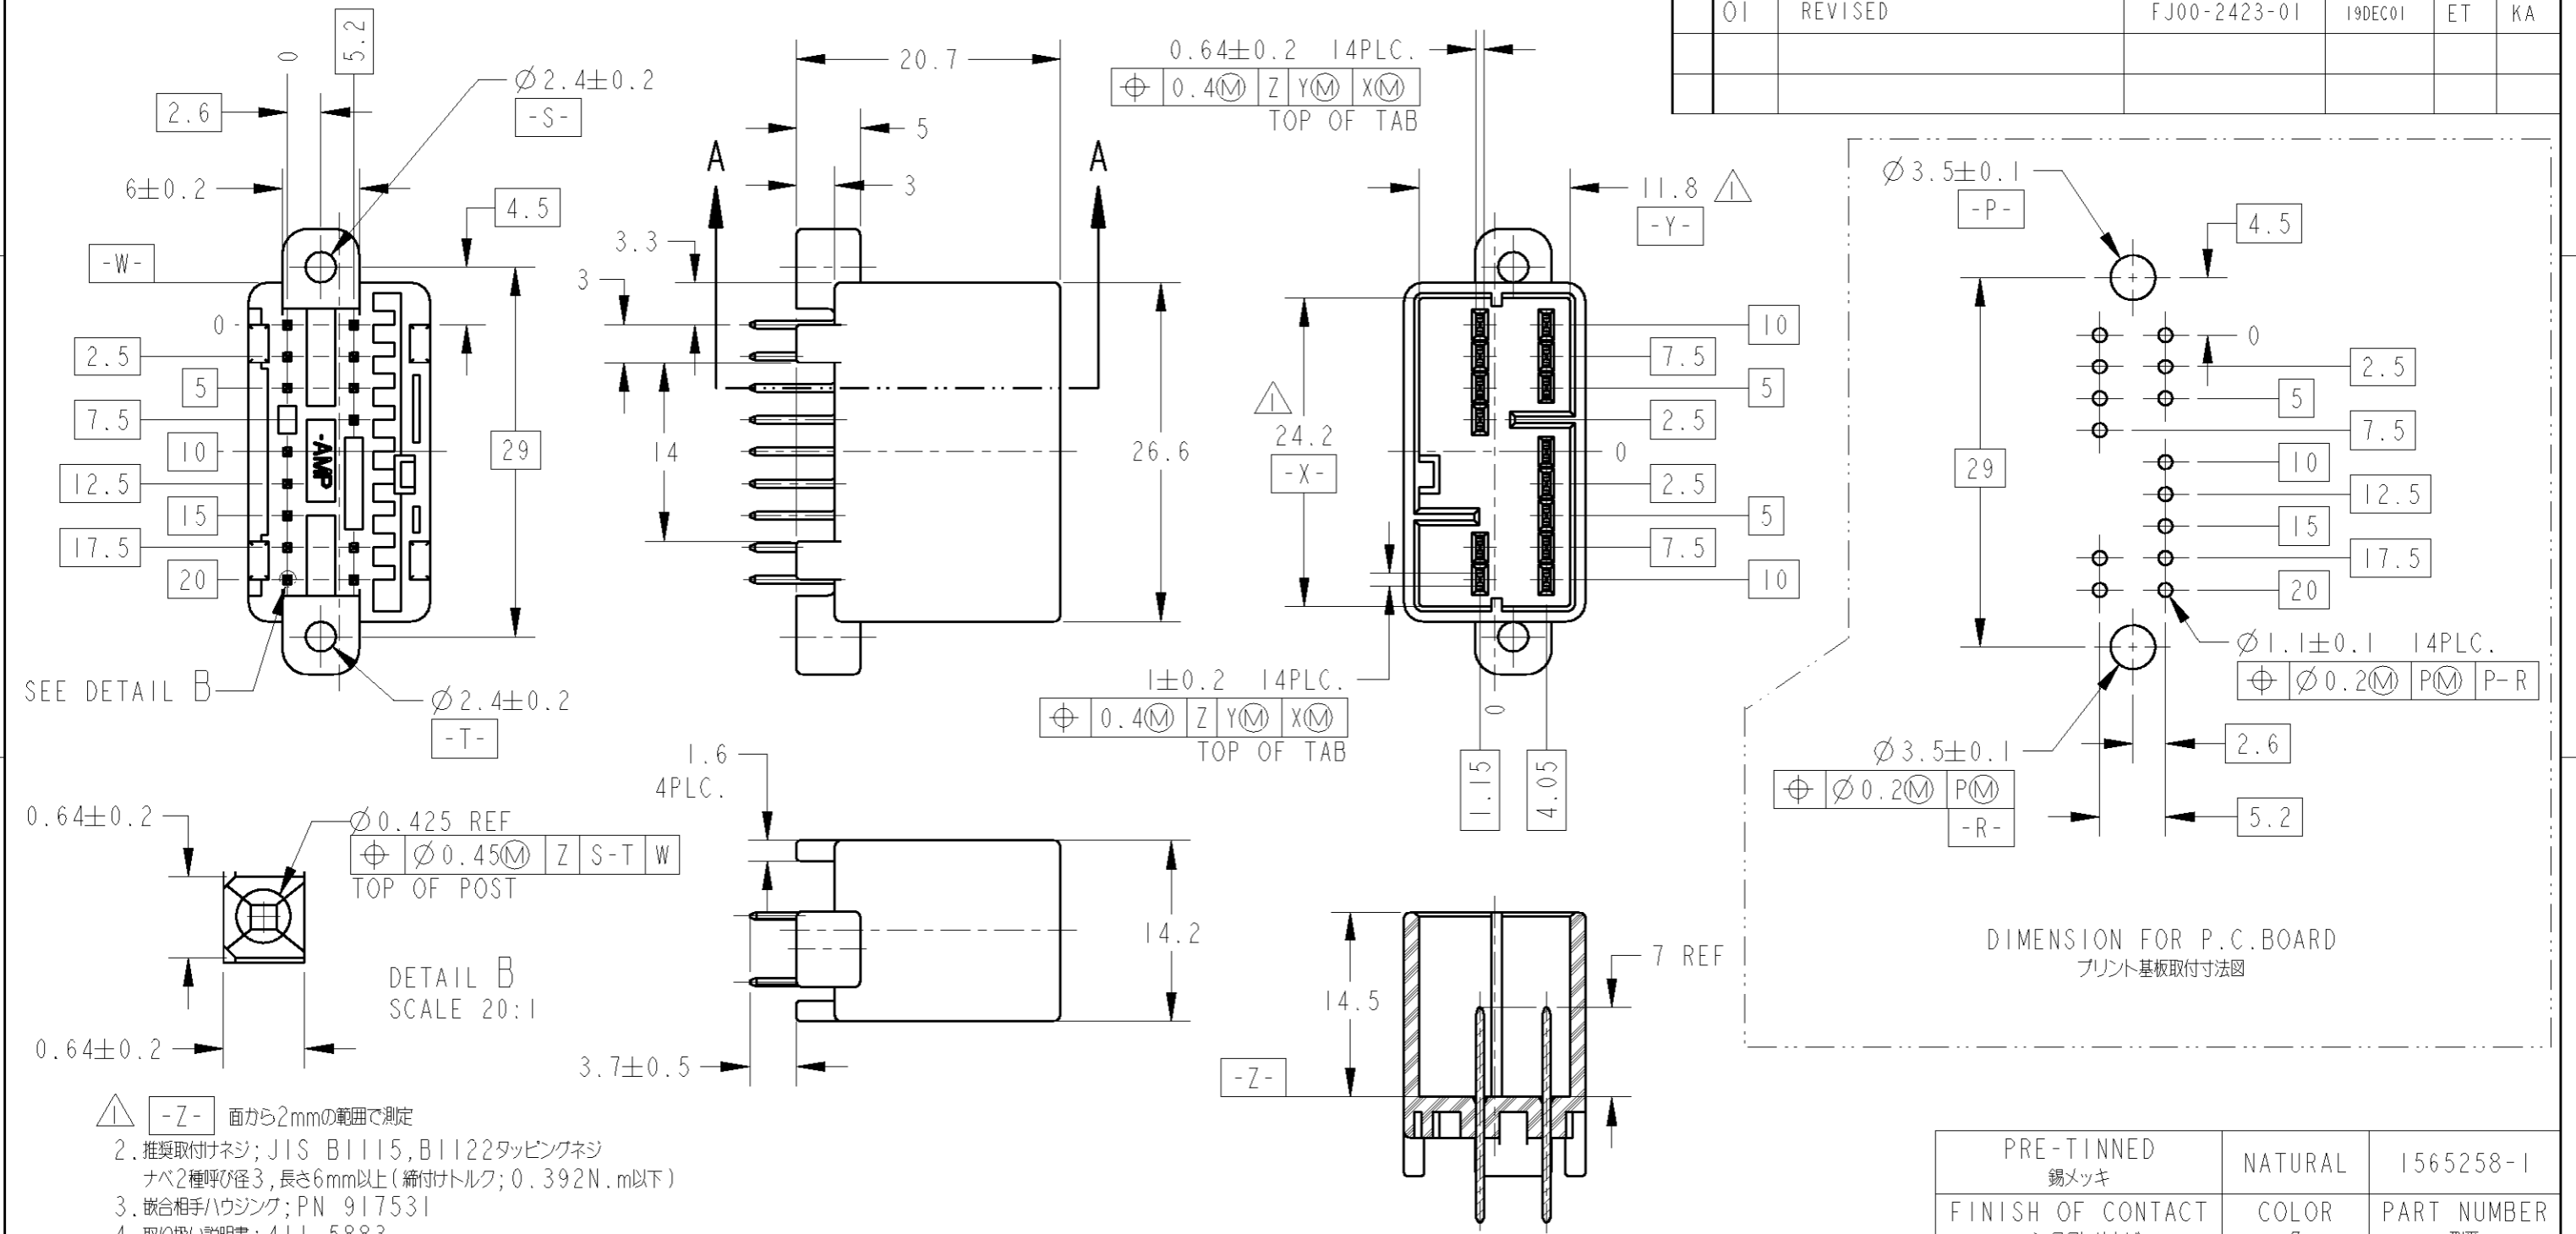

- △ -Z- 面から2mmの範囲で測定
- 推奨取付けネジ; JIS B1115, B1122タッピングネジ  
ナベ2種呼び径3, 長さ6mm以上 (締付けトルク; 0.392N.m以下)
  - 嵌合相手ハウジング; PN 917531
  - 取り扱い説明書; 411-5883
  - 梱包形態 ; 内装 - 紙チューブ  
外装 - ダンボール

- △ MUST BE KEPT BETWEEN -Z- AND 2.
- RECOMMENDED MOUNTING SCREW 3mm DIA, 6mm LENGTH MAX.  
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED  
IN JIS B1115, B1122.  
(TIGHTENING TORQUE; 0.392N.m MAX)
  - MATING PLUG HOUSING ; PN 917531
  - INSTRUCTION SHEET; 411-5883
  - PACKING STYLE ; INNER - PAPER TUBE  
OUTER - PAPER BOX

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION  
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION  
SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS: 単位: 概 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3	DWN E. TAKIZAWA 24OCT01
	0 PLC ±	CHK K. ASAI 24OCT01
	1 PLC ±0.1	APVD K. ASAI 24OCT01
	2 PLC ±0.01	PRODUCT SPEC 108-5470
	3 PLC ±0.001	APPLICATION SPEC 取付適用規格
MATERIAL 材料 PBT	FINISH 仕上 SEE TABLE	WEIGHT 5.3 g

PRE-TINNED 錫メッキ	NATURAL	1565258-1
FINISH OF CONTACT コンタクト仕上げ	COLOR 色	PART NUMBER 型番

WIRE RANGE 包合電線断面積 0.3~0.5 mm <sup>2</sup>	INSULATION DIA 被覆外径 1.1~2.0 mm	Tyco Electronics AMP K.K. Kawasaki, Japan	
NAME 名称 040MLC CONNECTOR 14POSITIONS CAP ASSEMBLY (VERTICAL TYPE)		SIZE A3	RESTRICTED TO
CAGE CODE 00779	DRAWING NO C=1565258	SCALE 尺度 2:1	SHEET OF 1
CUSTOMER DRAWING		REV 01	