



- Material:**
- Waterproof Rate: IP67
  - LED Holder: PC+ABS, Black
  - LED:  $\varnothing$ 3mm, Blue
  - O-ring: EPDM, Black
  - Screw Nut: Nylon+GF
  - Operating voltage: 4V DC
  - Operating Temperature:  $-40^{\circ}\text{C} \sim +80^{\circ}\text{C}$
  - For Panel Thickness 6.5mm Max.



Recommended Panel Cut-Out

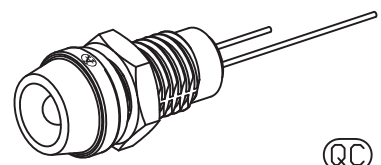

(QC) Quality Control: Important Dimension to check

Unit: mm



Scale	Free						Date	Name	Title <b>Waterproof LED</b> Blue color, plastic, $\varnothing$ 3.0mm
TOLERANCE						Drawn	05.03.14	Wilson	
X.	$\pm 0.3$					Approved	05.03.14	Groll	ASSMANN WSW-No. <b>A-LED8-1BAAS-PR7-1</b>
X.X	$\pm X$								Drawing-No. <b>ASS 6226 CO</b>
X.XX	$\pm X$								rev00
DIM	TOL								Replace
X.°	$\pm X^{\circ}$							Sheet	
X.X°	$\pm X^{\circ}$					1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us		Sheet	
Angle	TOL	Id.	Modification	Date	Name			1/1	