


THIS DRAWING IS UNPUBLISHED
 RELEASED FOR PUBLICATION 2006
 © COPYRIGHT 2006 ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|----------------------------|---------|--------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| A1 | - | R2 | REVISIED PER ECO-09-025714 | 16DEC09 | KK AEG |
| | | R3 | REVISIED PER ECR-10-022530 | 03MAY11 | KK HMR |


| POS. PER ROW | L +0.3 -0.6 | PART - NO. | POS. PER ROW | L +0.3 -0.6 | PART - NO. |
|--------------|----------------|---------------|--------------|----------------|--------------|
| - | - | - | -26 | 66.04 | 2- 826 119-6 |
| 2 | 5.08 | 826 119-2 | -27 | 68.58 | 2- -7 |
| 3 | 7.62 | -3/2 | -28 | 71.12 | 2- -8 |
| 4 | 10.16 | -4/2 | -29 | 73.66 | 2- -9 |
| 5 | 12.70 | -5/2 | -30 | 76.20 | 3- -0 |
| 6 | 15.24 | 6/2 | -31 | 78.74 | 3- -1 |
| 7 | 17.78 | -7 | -32 | 81.28 | 3- -2 |
| 8 | 20.32 | -8/3 | -33 | 83.82 | 3- -3 |
| 9 | 22.86 | -9/2 | -34 | 86.36 | 3- -4 |
| 10 | 25.40 | 1- -0/2 | -35 | 88.90 | 3- -5 |
| 11 | 27.94 | 1- -1/2 | -36 | 91.44 | 3- -6 |
| 12 | 30.48 | 1- -2/2 | -37 | 93.98 | 3- -7 |
| 13 | 33.02 | 1- -3/2 | -38 | 96.52 | 3- -8 |
| 14 | 35.56 | 1- -4/3 | -39 | 99.06 | 3- -9 |
| 15 | 38.10 | 1- -5/2 | -40 | 101.60 | 4- -0 |
| 16 | 40.64 | 1- -6/2 | -41 | 104.14 | 4- -1 |
| 17 | 43.18 | 1- -7/2 | -42 | 106.68 | 4- -2 |
| 18 | 45.72 | 1- -8/2 | -43 | 109.22 | 4- -3 |
| 19 | 48.26 | 1- -9/2 | -44 | 111.76 | 4- -4 |
| 20 | 50.80 | 2- -0/3 | -45 | 114.30 | 4- -5 |
| 21 | 53.34 | 2- -1/2 | -46 | 116.84 | 4- -6 |
| 22 | 55.88 | 2- -2/2 | -47 | 119.38 | 4- -7 |
| 23 | 58.42 | 2- -3/3 | -48 | 121.92 | 4- -8 |
| 24 | 60.96 | 2- -4/2 | -49 | 124.46 | 4- -9 |
| 25 | 63.50 | 2-826 119-5/2 | 50 | 127.00 | 5- 826 119-0 |

OBSOLETE
 2

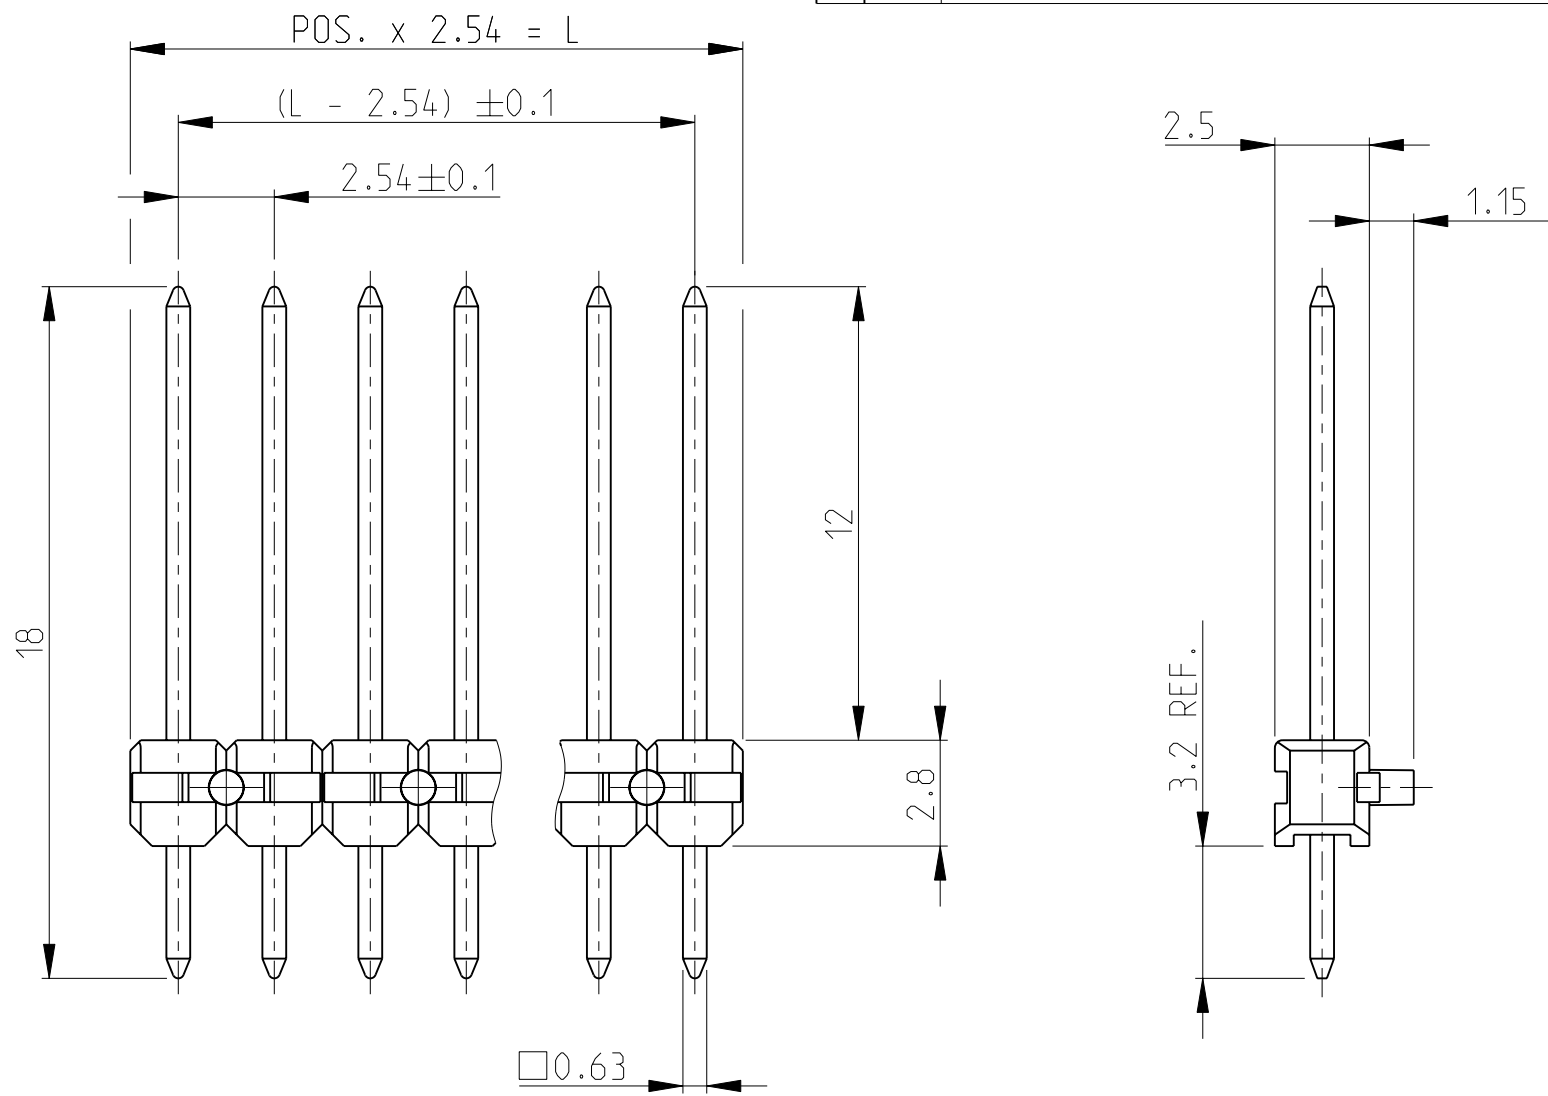

- 1 0,8 µm GOLD OVER 1.27 µm NICKEL (PRE GOLD-PLATED)
- 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 3 OBSOLETE

PC BOARD LAYOUT
 LEITERPLATTENANSCHLUSSBILD

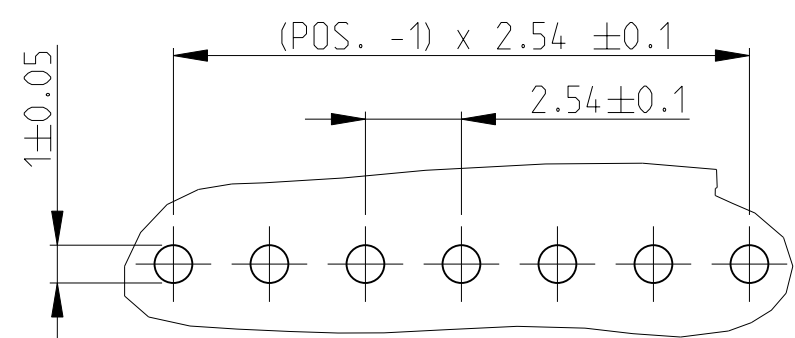

FOR TECHNICAL DATA
 REFER TO
 AMP SPEC. 108-18012

| | | | |
|--------------|-----------------------------|----------|------------------|
| 1 | CONTACT PIN KONTAKTSTIFT | Cu Sn | 2 |
| COLOUR GREEN | PINHOUSING STIFTGEHAEUSE | PBT GV | 1 |
| REMARK | DESCRIPTION BEZEICHNUNG | MATERIAL | ITEM LFD. NR. |

| | | | | |
|--|--|--------------------------|---|-----------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN DAHLHEIMER 05DEC1975 | TE Connectivity | |
| | | CHK BOCK 17DEC1975 | | |
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: | APVD - | NAME | |
| | 0 PLC ±0.2 1 PLC ±0.2 2 PLC ±0.2 3 PLC ± 4 PLC ± ANGLES ±2° | PRODUCT SPEC - | AMPMODU II PINHEADER SINGLE ROW STIFTLAISTE EINREIHIG | |
| MATERIAL - | FINISH - | APPLICATION SPEC - | SIZE A3 | CAGE CODE 00779 |
| | | WEIGHT - | DRAWING NO C-826119 | RESTRICTED TO - |
| CUSTOMER DRAWING | | | SCALE 5:1 | SHEET 1 OF 1 |
| | | | REV R3 | |