

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-. - .

© COPYRIGHT - BY - Taipei, Taiwan

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HY

-

P

LTR

DESCRIPTION

DATE

DWN

APVD

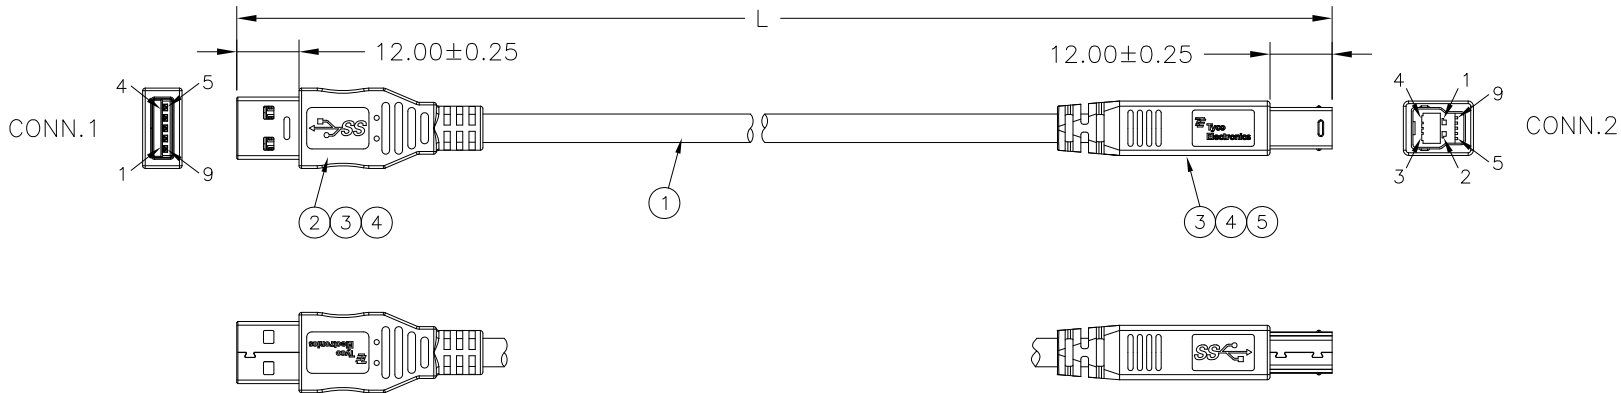
A

FIRST ISSUE

12,AUG,11'

SW

WW





PIN ASSIGNMENT		
CONN.1	COLOR	CONN.2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

TEST ALL PRODUCTS AS BELOW:  
 100% OPEN & SHORT TEST.  
 CONTACT RESISTANCE:3 OHM MAX.  
 INSULATION RESISTANCE:10 MOHM MIN.  
 WITHSTANDING VOLTAGE 300V(DC) 0.1sec.

1-2117154-0	1000±20
PART NUMBER	L

QTY	U/M	DESCRIPTION	ITEM
1	PC	USB 3.0 PLUG, B TYPE, AU PLATED 30u" FOR CONTACT AREA	5
AR	MR	COPPER FOIL TAPE	4
AR	KG	OVER MOLDED PVC, COLOR: BLACK.	3
1	PC	USB 3.0 PLUG, A TYPE, AU PLATED 30u" FOR CONTACT AREA	2
AR	MR	USB 3.0 CABLE, OD=4.5 (1P*32#+D+AL+Mylar)*2C+1P*32#+2C*26#+AL+B /UL20276	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WU 12,AUG,2011	 TE Connectivity	
DIMENSIONS: MM		CHK CP. ONG 12,AUG,2011		
		APVD W. WANG 12,AUG,2011	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± 3'		PRODUCT SPEC	USB 3.0 A to B Cable Ass'y	
MATERIAL SEE NOTE		QUALIFICATION TEST REPORT	SIZE A3	CAGE CODE 00779
FINISH SEE NOTE		WEIGHT	DRAWING NO C=2117154	RESTRICTED TO -
CUSTOMER DRAWING			SCALE -	SHEET 1 OF 2
			REV A	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-. - .

© COPYRIGHT - BY - Taipei, Taiwan

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

HY

-

P

LTR

DESCRIPTION

DATE

DWN

APVD

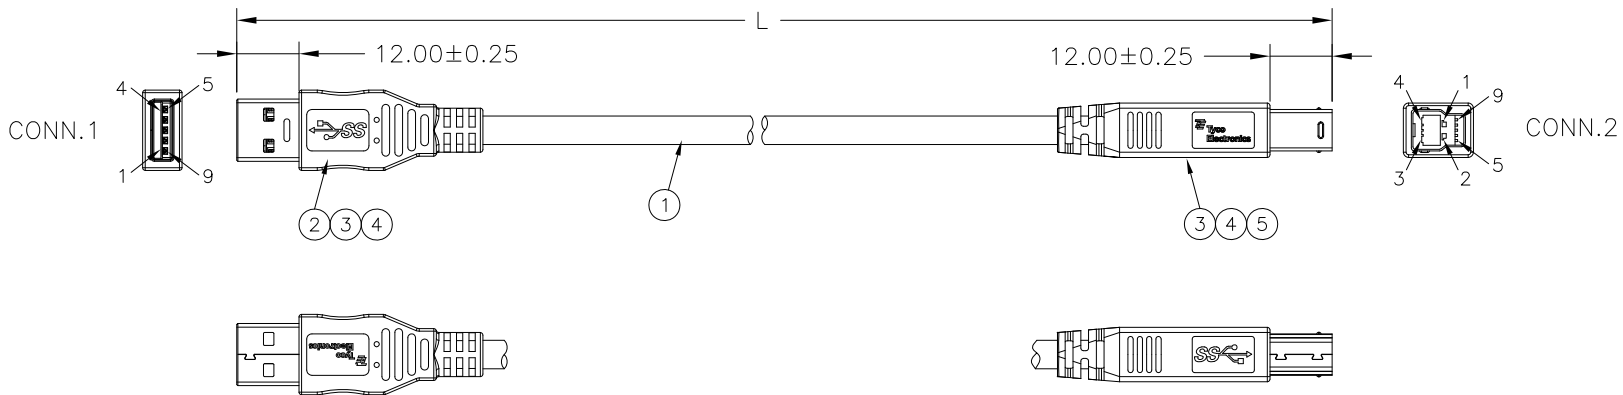
A

FIRST ISSUE

12,AUG,11'

SW

WW





PIN ASSIGNMENT		
CONN.1	COLOR	CONN.2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5	BLUE	5
6	YELLOW	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

TEST ALL PRODUCTS AS BELOW:  
 100% OPEN & SHORT TEST.  
 CONTACT RESISTANCE:3 OHM MAX.  
 INSULATION RESISTANCE:10 MOHM MIN.  
 WITHSTADING VOLTAGE 300V(DC) 0.1sec.

2-2117154-0	2000±20
1-2117154-5	1500±20
PART NUMBER	L

QTY	U/M	DESCRIPTION	ITEM
1	PC	USB 3.0 PLUG, B TYPE, AU PLATED 30u" FOR CONTACT AREA	5
AR	MR	COPPER FOIL TAPE	4
AR	KG	OVER MOLDED PVC, COLOR: BLACK	3
1	PC	USB 3.0 PLUG, A TYPE, AU PLATED 30u" FOR CONTACT AREA	2
AR	MR	USB 3.0 CABLE, OD=5.5 (1P*28#+D+AL+Mylar)*2C+1P*28#+2C*24#+AL+B /UL20276	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WU 12,AUG,2011	 TE Connectivity	
DIMENSIONS: MM		CHK CP. ONG 12,AUG,2011		
		APVD W. WANG 12,AUG,2011	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± 3'		PRODUCT SPEC	USB 3.0 A to B Cable Ass'y	
MATERIAL SEE NOTE		QUALIFICATION TEST REPORT	SIZE A3	CAGE CODE 00779
FINISH SEE NOTE		WEIGHT	DRAWING NO C=2117154	RESTRICTED TO -
CUSTOMER DRAWING			SCALE -	SHEET 2 OF 2
			REV A	