




MGV06054R7M-10

PHYSICAL DIMENSIONS:

A	7.30	±	0.50
B	6.70	±	0.30
C	5.00	±	0.30
D	2.90	±	0.30
E	1.60	±	0.50

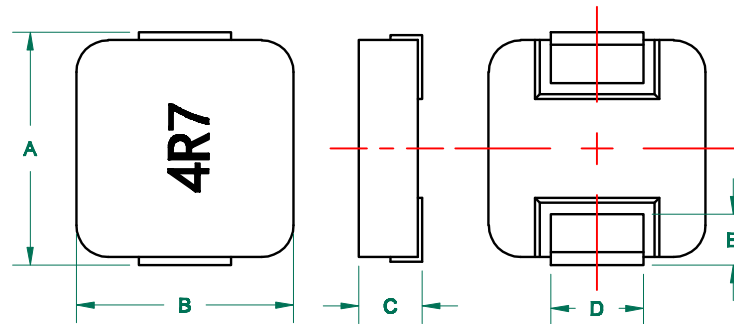


LAND PATTERNS FOR REFLOW SOLDERING

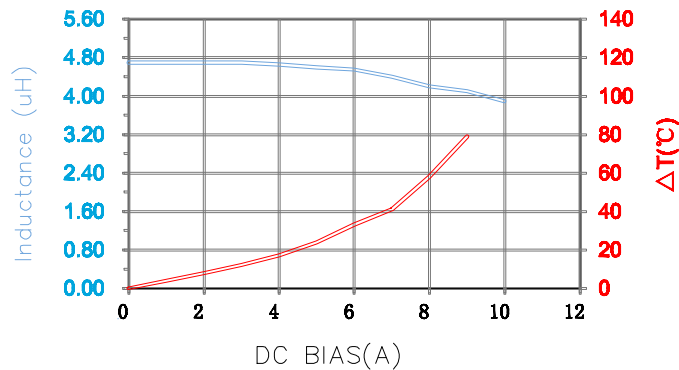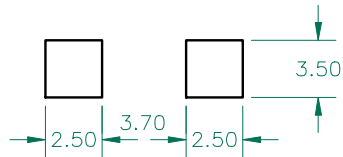

	Min	Nom	Max
INDUCTANCE (uH) L @ 100KHz/0.25V ± 20%	3.76	4.70	5.64
DCR (mΩ)			30.30

Saturation Current ³ Isat (A)	7.00
Temperature Rise Current ⁴ Irms (A)	6.50



UNCONTROLLED DOCUMENT



RoHS

NOTES: UNLESS OTHERWISE SPECIFIED

- COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
- OPERATION TEMPERATURE RANGE:
-40°C~+125°C (INCLUDING SELF-HEATING).
- DEFINITION OF SATURATION CURRENT (ISAT): DC CURRENT AT WHICH THE INDUCTANCE DROPS ≤25% FROM ITS VALUE WITHOUT CURRENT.
- DEFINITION OF TEMPERATURE RISE CURRENT (IRMS): DC CURRENT THAT CAUSES THE TEMPERATURE RISE (ΔT ≤40°C) FROM 25°C AMBIENT.

DIMENSIONS ARE IN mm.				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
				PROJECT/PART NUMBER:		PART TYPE:	DRAWN BY:
				MGV06054R7M-10		A POWER INDUCTOR	QIU
				DATE: 03/27/13		SCALE: NTS	SHEET:
				03/27/13 QIU			
				CAD #		TOOL #	
				MGV06054R7M-10-A		1 of 1	
REV	DESCRIPTION			DATE	INT		
A	ORIGINAL DRAFT			03/27/13	QIU		