

| REV | DATE | DESCRIPTION | BY |
|------|-----------|---------------------|-----|
| 01-b | 3/15/2011 | DVT Release | MPB |
| 01-a | 1/20/2011 | Initial EVT Release | MPB |

THIS DRAWING AND OR TECHNICAL INFORMATION IS THE SOLE PROPERTY OF TPK USA, LLC. AND IS FURNISHED FOR AUTHORIZED USE ONLY AND ON THE UNDERSTANDING AND CONDITION THAT IT IS CONFIDENTIAL. NEITHER THIS DOCUMENT NOR THE INFORMATION DISCLOSED HEREIN SHALL BE DISCLOSED TO OTHERS, COPIED, REPRODUCED OR OTHERWISE TRANSFERRED TO OTHER DOCUMENTS, OR USED FOR MANUFACTURING OR ANY OTHER PURPOSE EXCEPT AS AUTHORIZED BY TPK USA, LLC.

TOLERANCING
UNLESS OTHERWISE SPECIFIED
ALL DIMS ARE mm
RADIUS ±0.15
ANGLES ±0.5°
DO NOT SCALE DRAWING

Touch Revolution 1400 BRIDGE PARKWAY, SUITE 102
REDWOOD CITY, CA 94065 - USA

TRü 21.5" Open Frame Touch Monitor Overview Geometry

| | | | |
|------------------------------|-----|-----------|---------------|
| DR: MPB | CK: | Material: | SCALE: NTS |
| DATE: 1/20/2011 | | | SHEET: 1 OF 2 |
| DWG. No. K21A-0XXX-XX-X-01-a | | | VER. 01 |

THIRD ANGLE VIEW


2

1




2

1

RECOMMENDED PANEL CUT-OUT

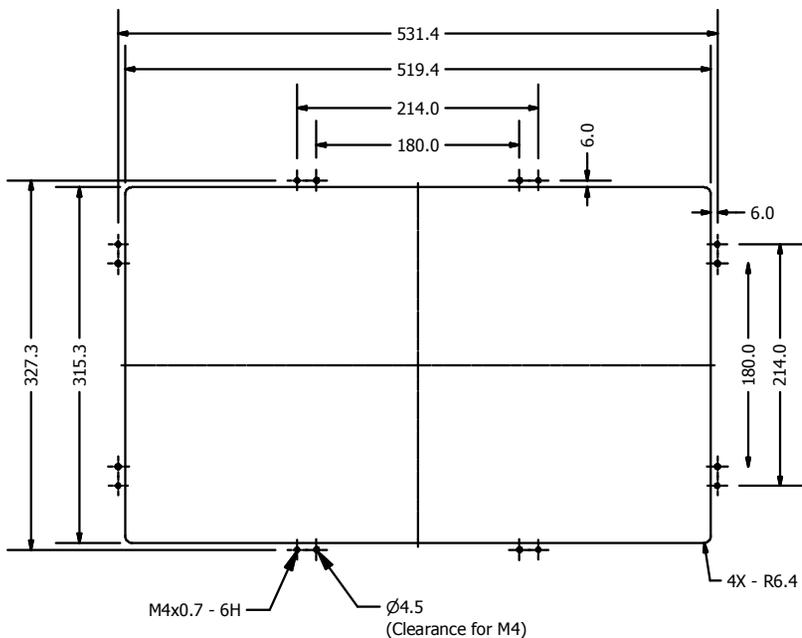

1. Inside two holes (180 mm) for M4 clearance holes.
2. Outside two holes (214 mm) for M4 threaded holes.
3. Wooden wall: Ø4.5mm thru holes for M4 screws w/nuts, or no thru holes, screws for wood 4mm.
4. Sheet metal: concealed head threaded studs M4 w/nuts.
5. Only two brackets are necessary for mounting. Drill 4 holes for top/bottom bracket mounting or 4 holes for side bracket mounting.

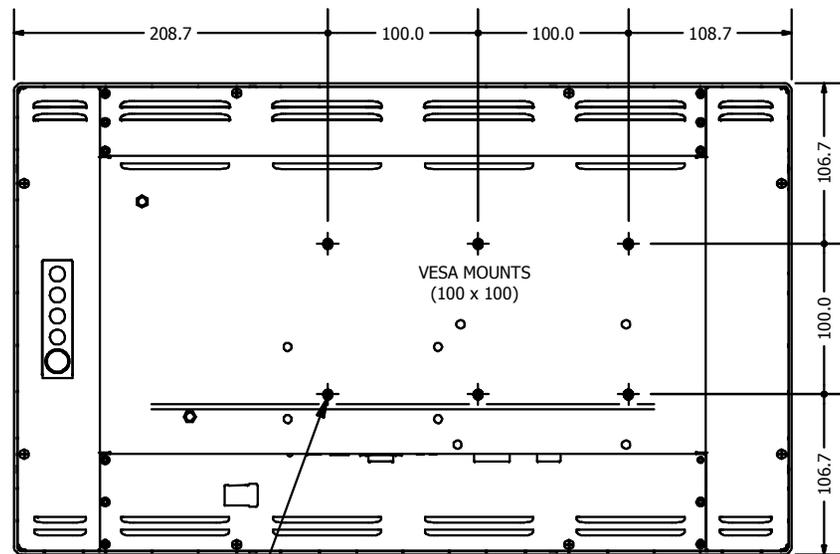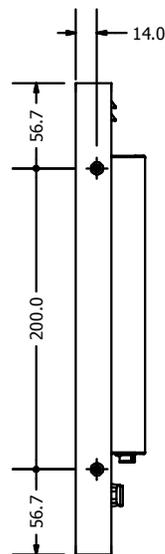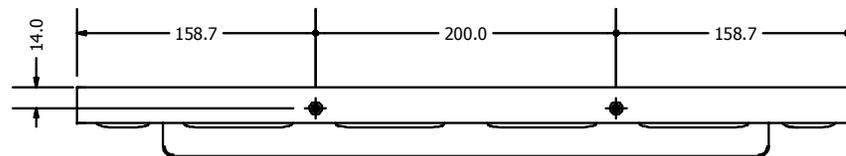

The distance between the back cover surface and the bottom of the screw hole is 8 mm. Please use four M4 screws with the proper length to mount the monitor if you are not using the included mounting brackets and M4x6 screws.

| Tolerance Table | |
|-----------------|----------------|
| Dimension Range | Tolerance (mm) |
| Under 25 mm | 0.1 |
| 25.1 - 100 mm | 0.2 |
| 100.1 - 250 mm | 0.4 |
| 250.1 - 400 mm | 0.8 |
| 400.1 - 500 mm | 1.5 |
| 500.1 - 630 mm | 2.0 |
| 630.1 - 800 mm | 2.5 |

| REV | DATE | DESCRIPTION | BY |
|------|-----------|---------------------|-----|
| 01-b | 3/15/2011 | DVT Release | MPB |
| 01-a | 1/20/2011 | Initial EVT Release | MPB |

THIS DRAWING AND OR TECHNICAL INFORMATION IS THE SOLE PROPERTY OF TPK USA, LLC. AND IS FURNISHED FOR AUTHORIZED USE ONLY AND ON THE UNDERSTANDING AND CONDITION THAT IT IS CONFIDENTIAL. NEITHER THIS DOCUMENT NOR THE INFORMATION DISCLOSED HEREIN SHALL BE DISCLOSED TO OTHERS, COPIED, REPRODUCED OR OTHERWISE TRANSFERRED TO OTHER DOCUMENTS, OR USED FOR MANUFACTURING OR ANY OTHER PURPOSE EXCEPT AS AUTHORIZED BY TPK USA, LLC.

TOLERANCING
UNLESS OTHERWISE SPECIFIED
ALL DIMS ARE mm
RADIUS ±0.15
ANGLES ±0.5°
DO NOT SCALE DRAWING



1400 BRIDGE PARKWAY, SUITE 102
REDWOOD CITY, CA 94065 - USA

TRü 21.5" Open Frame Touch Monitor
Mounting Geometry

| | | | |
|------------------------------|---------|------------------|---------------|
| DR: MPB | CK: | Material: | SCALE: NTS |
| DATE: 1/20/2011 | | | SHEET: 2 OF 2 |
| DWG. No. K21A-0XXX-XX-X-01-a | VER. 01 | THIRD ANGLE VIEW | |