

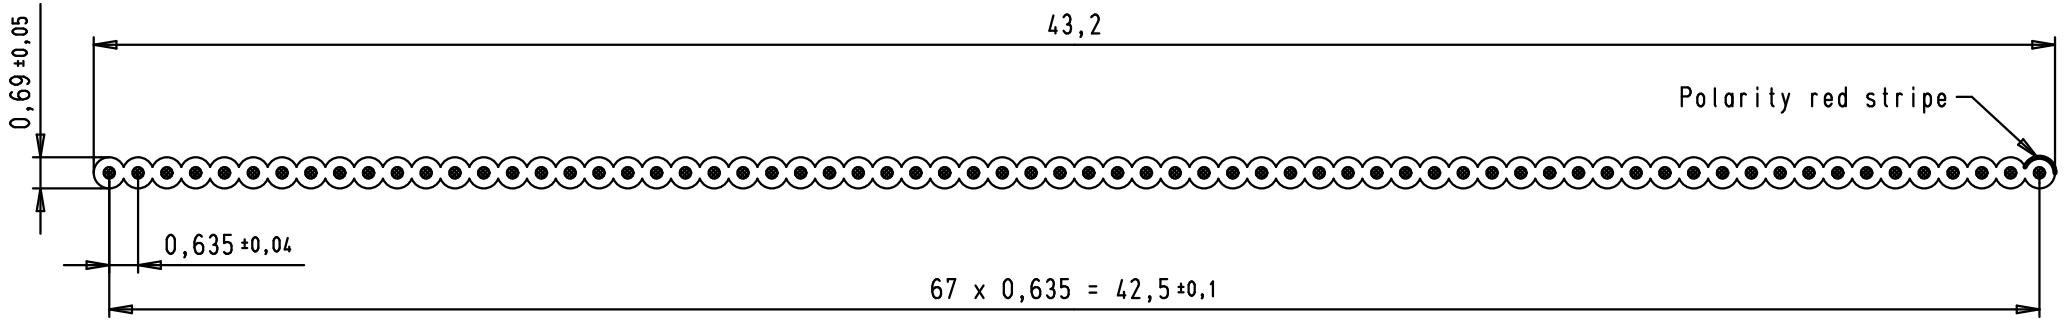
5

4



3

2

1



Wire _____ Cu tin plated
 Gauge stranded _____ AWG 30 / 7 strands AWG 38
 Voltage rating _____ 150 V
 Capacitance _____ 83,2 pF/m (single end)
 _____ 47,6 pF/m (differential)
 Impedance _____ 67 Ω (single end)
 _____ 110 Ω (differential)
 Conductor resistance _____ 348 mΩ/m
 Signal delay _____ 5,31 ns/m
 Insulation material _____ PVC
 Temperature rating _____ -30°C to +105°C

				Dot.	Name	 All Dim. in mm Orig. Size DIN A 4	Flat cable Length per reel : 30,48 m 68 poles, UL 2678	Maßstab/ Scale 6:1
			Detail.	31/05/07	PK			
			Insp.					
			Stand.					
			34361	31/05/07	PK	 HARTING EURL F-95972 Paris	TB 60 90 068 6008	Blatt/ Page 1 / 1
			Mod.	Dot.	Name			