


A
B
C
D
E
F
G
H

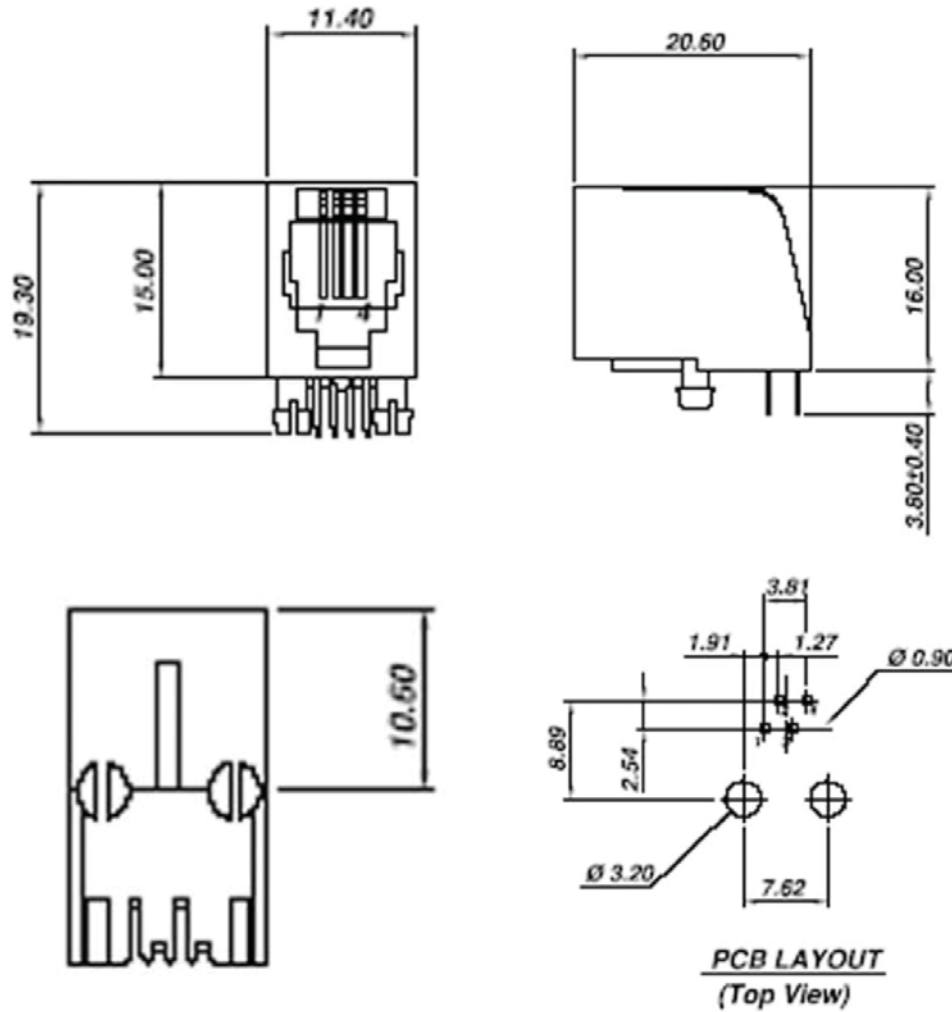

Materials:

- Insulator: P.B.T. Glass Filled, UL94V-0
- Soldering Temperature: 235°C
- Spring Wire: 0.35MM Thickness Phosphor Bronze Gold Plating over Nickel
- Color: Black

Electrical:

- Insulation Resistance: 500MΩ Min.
- Contact Resistance: 20MΩ Max.
- Rating Current: 1.5A Max.
- Rating Voltage: 120V AC
- Dielectric Withstanding: 1,000V AC at 1 Minute
- Operating Temperature: -40°C ~ +85°C
- Durability: 500 Mating cycles Min.



Scale	1:1						Name
TOLERANCE						Drawn	12.20.11
X.X	±0.40					Approved	Chappell
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
		Modification	Date	Name			

Item No.	A-2004-3-4-N
Title	Modular Jack, 4P4C, 90°, Side Entry, 6μ., Without Flange, Black, PBT Glass Filled
Drawing No.	rev00
Replace	Sheet

A
B
C
D
E
F
G
H