

## DETAILS

|                        |                  |
|------------------------|------------------|
| <b>Product Number</b>  | CA10561_OSS-2-RS |
| <b>Family</b>          | Rose             |
| <b>Type</b>            | Assembly         |
| <b>Color</b>           | white            |
| <b>Diameter</b>        | 21,6 + 21,6 mm   |
| <b>Height</b>          | 13,9 mm          |
| <b>Style</b>           | square           |
| <b>Optic Material</b>  | PMMA             |
| <b>Holder Material</b> |                  |
| <b>Fastening</b>       | tape             |
| <b>Status</b>          | production ready |
| <b>ROHS Compliant</b>  | Yes              |
| <b>Date Updated</b>    | 26/06/2013       |


## OPTICAL PROPERTIES

| LED            | Viewing<br>Angle | Light<br>Beam | Effi-<br>ciency | cd/lm  | Connector |
|----------------|------------------|---------------|-----------------|--------|-----------|
| Golden Dragon+ | 7 deg            | Real spot     | -               | 35.500 | -         |




**Ledil oy CA10561\_OSS-2-RS (Golden Dragon+) LOR=92% / LDC (Linear)**

Luminaire: Ledil oy CA10561\_OSS-2-RS (Golden Dragon+) LOR=92%  
Lamps: 1 x Osram Golden Dragon+ 67lm @ 250mA

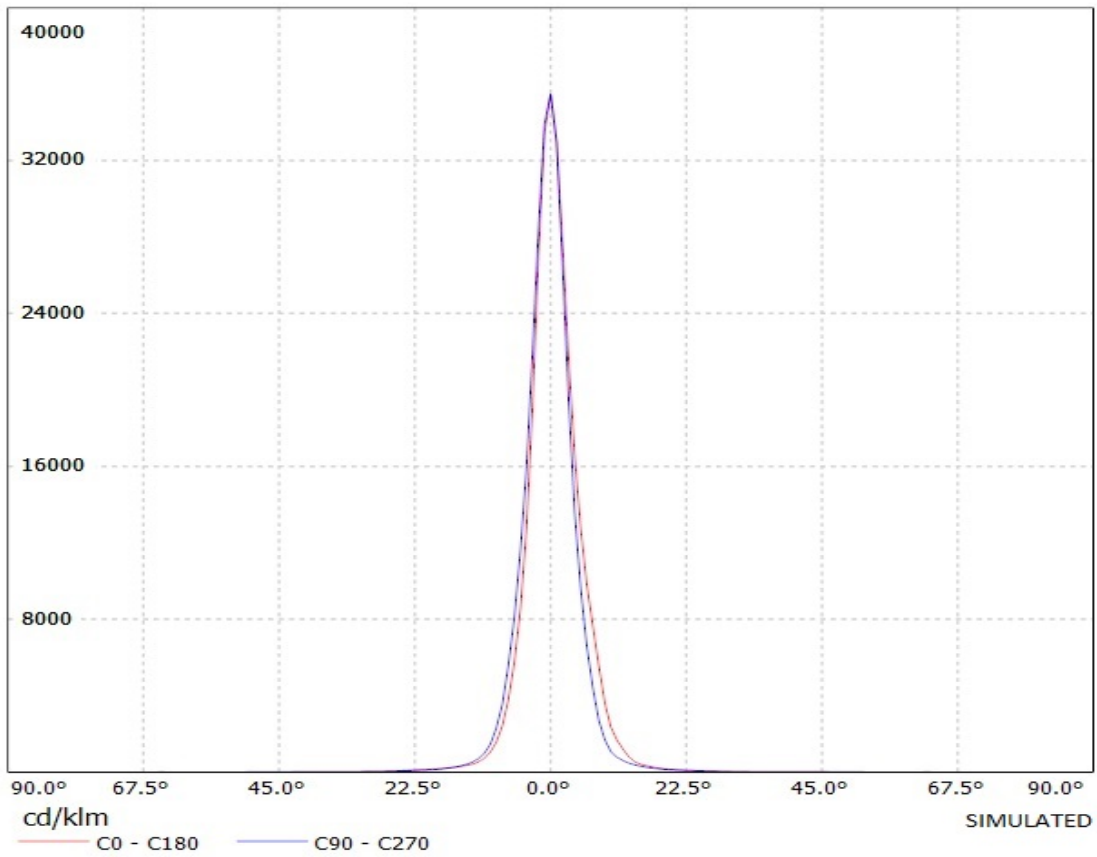

# Ledil oy CA10561\_OSS-2-RS (Golden Dragon+) LOR=92% / LDC (Polar)

Luminaire: Ledil oy CA10561\_OSS-2-RS (Golden Dragon+) LOR=92%  
Lamps: 1 x Osram Golden Dragon+ 67lm @ 250mA

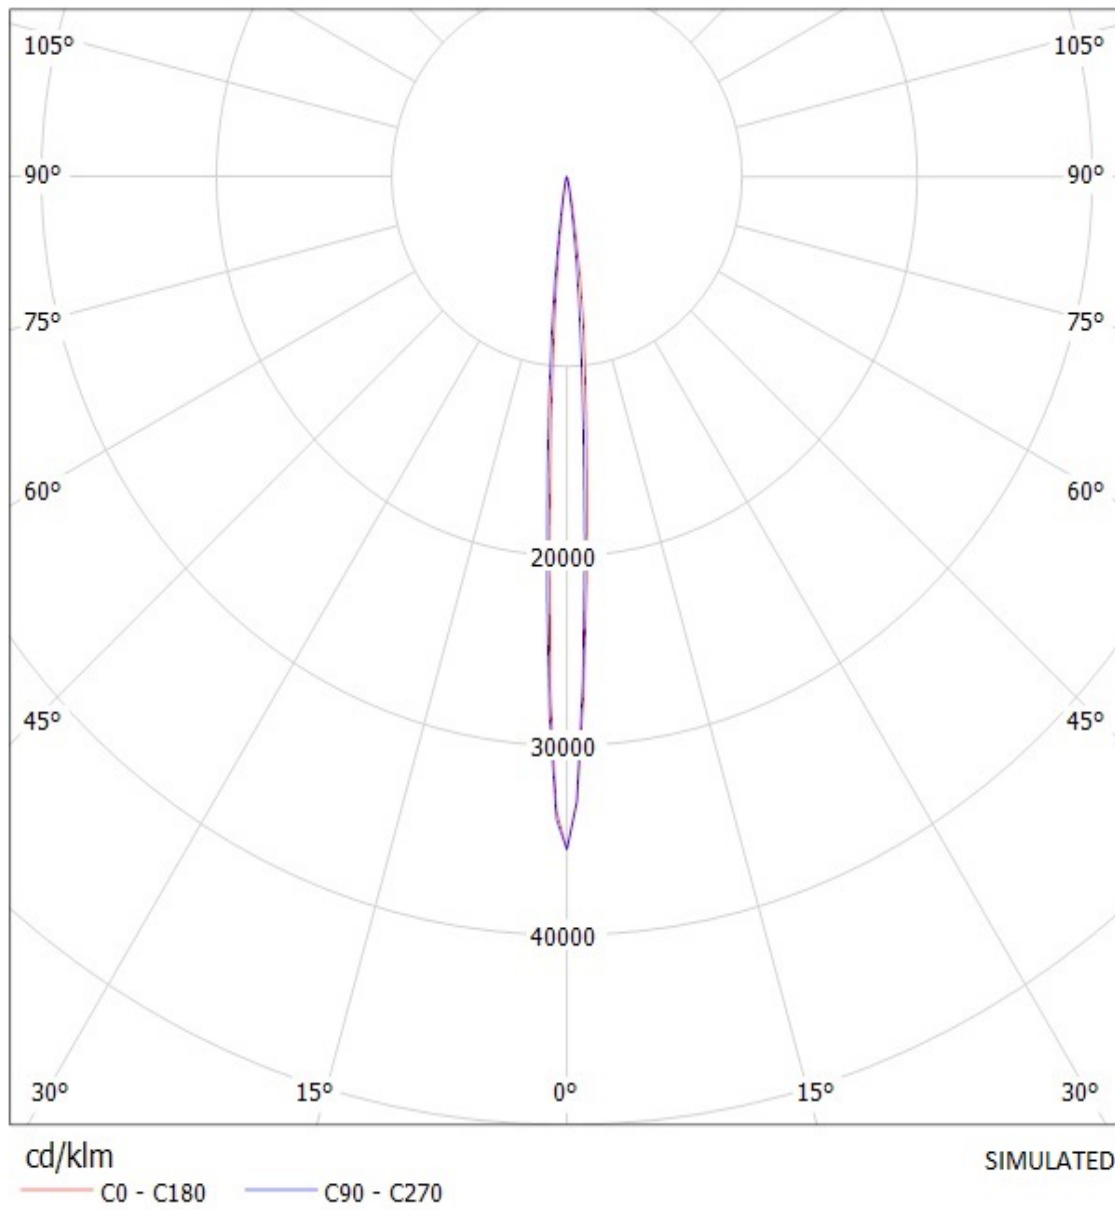

**NOTE: The typical divergence will be changed by different color, chip size and chip position tolerance. The typical total divergence is the full angle measured where the luminous intensity is half of the peak value.**