


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
H	-	C	ECR-13-019418	12DEC2013	MO MO

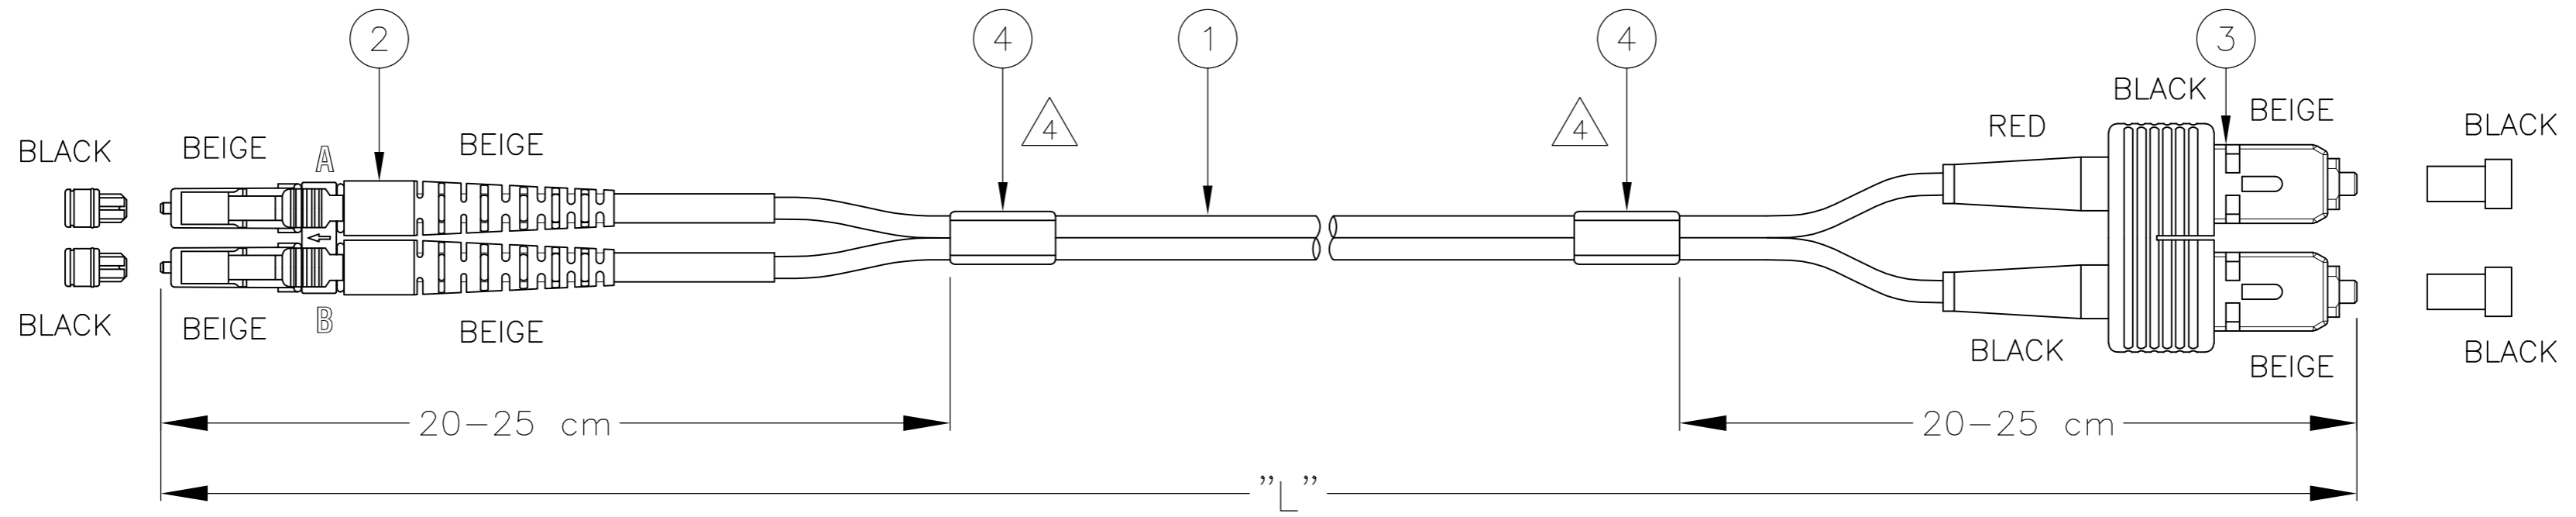

LC CONN. SIDE MARK	SC CONN. BOOT COLOUR
A	RED
B	BLACK

**NOTES:**

- 1 ATTENUATION  $\leq 0.3$  dB, MEASURED AT 850nm ACC. IEC 61300-3-4 INSERTION METHOD B WITH MODAL CONDITION ACC TO: IS 14763-3, OFSTP-14, IEC 61280-4-1
- 2 RETURN LOSS  $\geq 25$  dB, MEASURED IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 850nm
- 3 FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
- 4 INFORMATION ON LABEL:
  - UNIQUE SERIAL NUMBER
  - TE PART NUMBER
  - MANUFACTURING LOCATION
  - PRODUCTION DATE (YY/WW)
- 5 CABLE INFORMATION (OM3 BIMM):
  - FIBER: CORE 50  $\mu$ m
  - OUTER DIAMETER: 2.5 x 5.0 mm
  - OUTER SHEATH COLOUR: AQUA
  - OUTER SHEATH MATERIAL: LSZH

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-1920443-Y	XY.0

Qty	Description	Item
2	FOAC INFORMATION LABEL	4
1	DUPLEX SC CONNECTOR WITH CLIP, MULTI MODE	3
1	DUPLEX LC CONNECTOR WITH CLIP, MULTI MODE, BEIGE	2
L	FOCAB OM3 2.5TZ 50/125 LSZH, AQUA	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. PEETERS 15FEB2007		
DIMENSIONS: mm		CHK A. HENGELMOLEN 15FEB2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 15FEB2007	NAME	
0 PLC $\pm$ -		PRODUCT SPEC	FOMM50 LEAD OM3 2.5TZ LC - SC DUPLEX	
1 PLC $\pm$ -		APPLICATION SPEC	SIZE A2	CAGE CODE 00779
2 PLC $\pm$ -		WEIGHT -	DRAWING NO C=1920443	RESTRICTED TO -
3 PLC $\pm$ -		FINISH -	SCALE NTS	SHEET 1 of 1
4 PLC $\pm$ -		CUSTOMER DRAWING	REV C	
ANGLES $\pm$ -				