EXB30 Series




Dual positive output

DC-DC CONVERTERS

30 W High Efficiency DC-DC Converters

- Two independent positive outputs
- Output voltage tracking
- High efficiency
- Approved to EN60950, UL1950, CSA C22.2 No. 950
- Operating ambient temperature of -40 °C to +70 °C (natural convection)
- Up to 100% load imbalance
- Separate trim on each output
- No minimum load
- Complies with ETS 300 019-1-3/2-3
- Fully compliant with ETS 300 386-1
- Available RoHS compliant

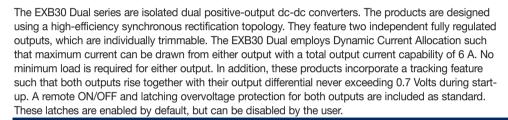











All specifications are typical at nominal input, full load at 25 °C unless otherwise stated

SPECIFICATIONS

OUTPUT SPECIFICATIONS

0011 01 01 2011 1071110			
Voltage adjustability	Both outputs		±11% min.
Voltage accuracy	Both outputs		±1.5% max.
Line regulation	Low line to high Low line to high		Vout1 ±0.4% Vout2 ±0.4%
Load regulation	Full load to no l	oad	±0.4%
Minimum load	Both outputs		0%
Ripple and noise 20 MHz bandwidth			nV pk-pk max.) mV rms max.
Temperature coefficient			±0.02%/°C
Transient response peak dev. settling time	50% to 75% and to 1.0%, no ext		150 mV 400 µs
Short circuit protection Isc 8 Arms (See Note 3)	Both outputs	autor	Continuous matic recovery
Tracking			al 0.7 V during ad in operation

EMC CHARACTERISTICS

ETS 300 386-1 table 5 Conducted emissions Radiated emissions	EN55022 with ex EN55022 with ex EN55022 (See A	xternal filter	Level A Level B Level B
Immunity: ESD air ESD contact	EN61000-4-2 EN61000-4-2	8 kV (NP), 15 6 kV (NP), 5	3 kV (RP)
EFT DC power EFT signal Radiated field enclosure	EN61000-4-4 EN61000-4-4 EN61000-4-3		kV (LFS) V/m (NP)
Surges indoor signal Conducted (DC power) Conducted (signal)	EN61000-4-5 EN61000-4-6 EN61000-4-6	1	00 V (RP) 10 V (NP) 10 V (NP)
Input transients	ETS 300 132-2,	ETR 283	

INPUT SPECIFICATIONS

Input voltage range	24 Vin nominal 48 Vin nominal	18-36 Vdc 36-75 Vdc		
Input current	No load Remote OFF	150 mA max. 4 mA max.		
UVLO turn ON voltage UVLO turn OFF voltage	All inputs (See Note 2) All inputs (See Note 2)	94% typ. 86% typ.		
Start-up time	Nominal line	20 ms max.		

Active high remote ON/OFF

Logic compatibility Open Collector ref. to -input Open circuit voltage 4.5 Vdc ON OFF 0.6 Vdc

GENERAL SPECIFICATIONS

Efficiency	_	See table
Basic insulation	Input/output	1500 Vdc
Input fuse 24 V Input fuse 48 V	(See Note 4)	3.5 A slow blow 2.0 A slow blow
Switching frequency	Fixed	280 kHz
Approvals and standards (See Notes 4, 6)		EN60950 Bi-national UL1950 CSA C22.2 No. 950
Weight		52 g (1.84 oz)
MTBF (See Application Note 109)	MIL-HDBK-217	6,283,000 hours

ENVIRONMENTAL SPECIFICATIONS				
Thermal performance	Operating ambient temperature Non-operating	-40 °C to +70 °C, See curves -55 °C to +105 °C		
ETS 300 019-2-3	(Classes T3.1 to T3.5		
Air temperature	Low: IEC 68-2-1 High: IEC 68-2-2 Change: IEC 68-2-1	-40 °C +70 °C 4 -40 °C to +70 °C		
Relative humidity	IEC 68-2-56 IEC 68-2-30	10% to 100% RH		

EXB30 Series



Dual positive output

DC-DC CONVERTERS 30 W High Efficiency DC-DC Converters


2

For the most current data and application support visit www.artesyn.com/powerqroup/products.htm

INPUT	OUTPUT VOLTAGE		OUTPUT C	CURRENT (5) OVP (1)		TYPICAL	MODEL	
VOLTAGE	1	2	1	2	1	2	EFFICIENCY	NUMBER (7,8)
18-36 Vdc	5 V	3.3 V	6 A	6 A	6.25 V	4.13 V	87%	EXB30-24D05-3V3J
18-36 Vdc	3.3 V	2.5 V	6 A	6 A	4.13 V	3.13 V	85%	EXB30-24D3V3-2V5J
36-75 Vdc	5 V	3.3 V	6 A	6 A	6.25 V	4.13 V	88%	EXB30-48D05-3V3J
36-75 Vdc	3.3 V	2.5 V	6 A	6 A	4.13 V	3.13 V	85%	EXB30-48D3V3-2V5J


Notes

- 1 Latching OVP response time is 1 ms (typical). OVP latch is reset by toggling remote ON/OFF or by recycling the input voltage.
- 2 Figures are percentage of minimum input voltage.
- 3 Rshort ≤20 mΩ.
- 4 User must provide recommended fuses in order to comply with safety approvals.
- Maximum continuous output power. 30 Watts for D05-3V3J models 20 Watts for D3V3-2V5J models.
- 6 Maximum temperature on hot spots not to exceed 120 °C. See Application Note 109 on our website for details.
- 7 The 'J' suffix indicates that these parts are Pb-free (RoHS 6/6) compliant. TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at http://www.artesyn.com/powergroup/products.htm to find a suitable alternative.

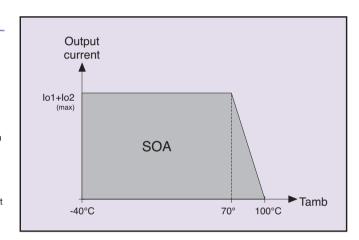

EXTERNAL OUTPUT TRIMMING

All models can be externally trimmed by ±11% using either method shown below

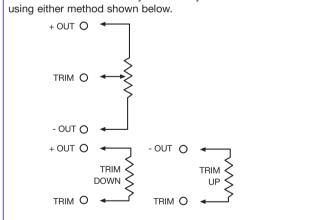

CAUTION: Hazardous internal voltages and high temperatures. Ensure that unit is not user accessible.

International Safety Standard Approvals



UL/cUL CAN/CSA 22.2 No. 60950-00 : UL 60950

File No. E1741404

VDE Licence No. 122485. File No. 10401-3336-0157 CB Report and Certificate to IEC60950, Certificate No. DE1-31103

EXB30 Series




Dual positive output

DC-DC CONVERTERS

30 W High Efficiency DC-DC Converters

2

For the most current data and application support visit www.artesyn.com/powergroup/products.htm

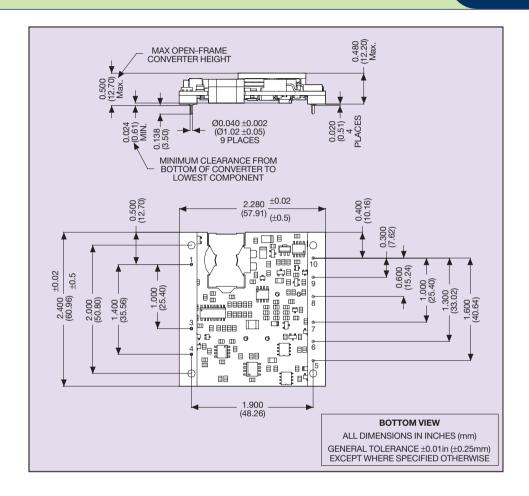

PIN CONNECTIONS			
FUNCTION			
- Vin			
No Pin			
Remote ON/OFF			
+ Vin			
OP1 Trim			
OP1 Return			
OP1			
OP2 Trim			
OP2 Return			
OP2			

Datasheet © Artesyn Technologies® 2005

The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Please consult our website for the following items: V Application Note V Longform Data Sheet

www.artesyn.com